

Point of Sale • Point of Sale • Point of Sale • Point of Sale •

Delivering next-generation, high performance POS technology

Sharp's sleek, compact UP-X300C with embedded Microsoft® Windows® CE.NET provides a simple, fast and extremely reliable solution when utilized in a complex environment. This "appliance level" POS solution is less resource intensive, boots up quickly and is easy to manage and maintain.

High performance platform

- › Brilliant 12.1" TFT Color LCD display for optimum clarity and viewing various environments
 - › User-friendly analog touch-panel display with Pen Touch technology speeds up order entry and increases accuracy
 - › Touch Panel software enables you to adjust the sensitivity of the touch-panel display
 - › Industrial grade, high performance compact flash designed and certified for applications which require extreme environment tolerance with high-performance sustained write speed
 - › Versatile 3-track ISO 7811 Magnetic Stripe Reader covers credit transactions and specialized applications
- Sleek, high-style design for discreet placement in upscale establishments
- › Small footprint requires minimal space

Powerful expansion capabilities

- › 128MB main memory
- › Standard 10Base T / 100 Base TX Ethernet LAN port for optional peripherals and communications
- › Versatile I/O ports allow for expansion and customization
 - Serial, USB ports for custom configuration
 - PS2 port for adding an AT keyboard
 - External VGA output
 - Specialized cash drawer ports enable you to maximize the number of printers on the system

Optional accessories for a customized solution

- › Customize the UP-X300C to suit your business needs with operator and/or remote pole display, cash drawers and printers. Check with software providers for integration options.


Reliable, Stable Hardware



UP-X300C

CE.NET POS

CONFIGURATION

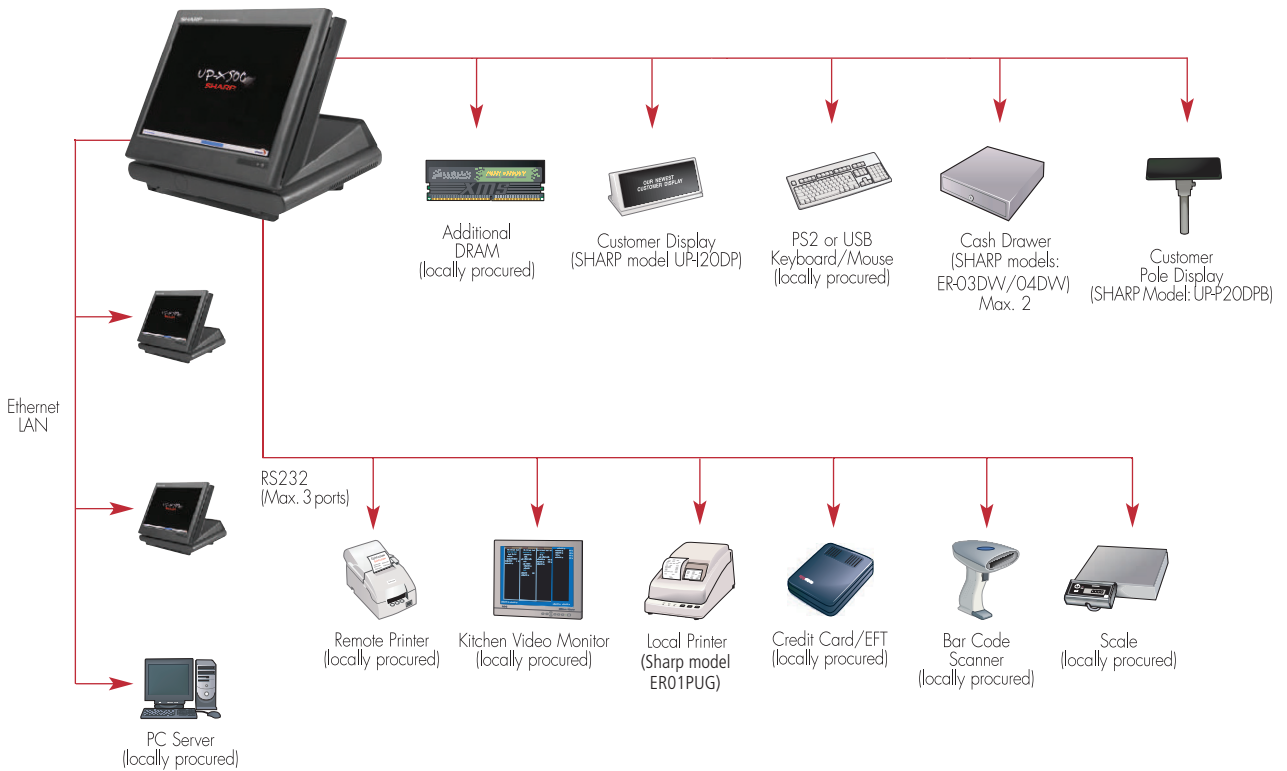

SPECIFICATIONS

Operator Display:	12.1" color LCD display with back-light TFT/XGA/16-bit color resolution touch panel
Customer Display:	Optional integrated or remote pole 2 lines with 20 char. dot each line
CPU:	VIA Eden ESP 7000 Series
Main Memory:	DDR is 128 MB standard; BIOS ROM is 512 KB (Flash ROM) Video RAM is 16 MB (shared)
Ethernet LAN:	Standard 10Base-T/100 Base-TX
I/O Ports/	RS-232: 3 standard D-Sub ports
External Bus:	USB: 2 standard USB 2.0 VGA: 1 standard Cash Drawer: 2 PS2
Power Source:	120V +/- 10% AC/60 Hz
Power Consumption:	43W (operating)
Dimensions:	12.5 x 12.2 x 11.2 approx.
Weight:	12.6 pounds

Color:	Black
Working Temperature:	0° to 40° C (32° to 140° F)
Working Humidity:	10% to 90%

OPTIONAL ACCESSORIES

- UP-120DP: Integrated 2 line (20 char.) display
- UP-P20DPB: 2-line (20 char.) remote pole display
- ER-01PUG: 2-station thermal printer
- ER-03DWB7: 7B/5C cash drawer, black
- ER-75CC3: Coin case for the ER-03DW
- UP-W01MK: Wall mounting bracket
- Other 3rd party accessories sold through local procurement. Check with software providers for complete integration options.

OPTIONAL THERMAL PRINTER MODEL ER-01PUG	
Paper Width:	1.75" ± .02" (44.5 mm ± 0.5mm)
Paper Thickness:	.06 mm to .08 mm
Paper Roll	3.15" (80 mm) maximum
Diameter:	
Paper Type:	Thermal
Other Printing Functions:	<ul style="list-style-type: none"> • Graphic logo capability • Receipt and journal independent feed function • Print stop function • Paper end sensor

OPTIONAL DRAWER MODEL ER-03DW	
Bill:	5 compartments
Coin:	5 compartments
Features:	<ul style="list-style-type: none"> • Security lock • Drawer open sensor • Pull out cash till • Heavy duty metal construction
Coin Case:	Model ER-55CC2, Beige

Design and specifications are subject to change without notice.

Sharp is a registered trademark of Sharp Corporation. Windows® is a registered trademark of Microsoft Corporation in the United States and other countries. All other trademarks are the property of their respective owners.

06F-00

SHARP®

SHARP ELECTRONICS CORPORATION
Sharp Plaza, Mahwah, NJ 07430-2135
1-800-BE-SHARP • www.sharpsusa.com/xxx